


Detail D – Single Ridge Beam

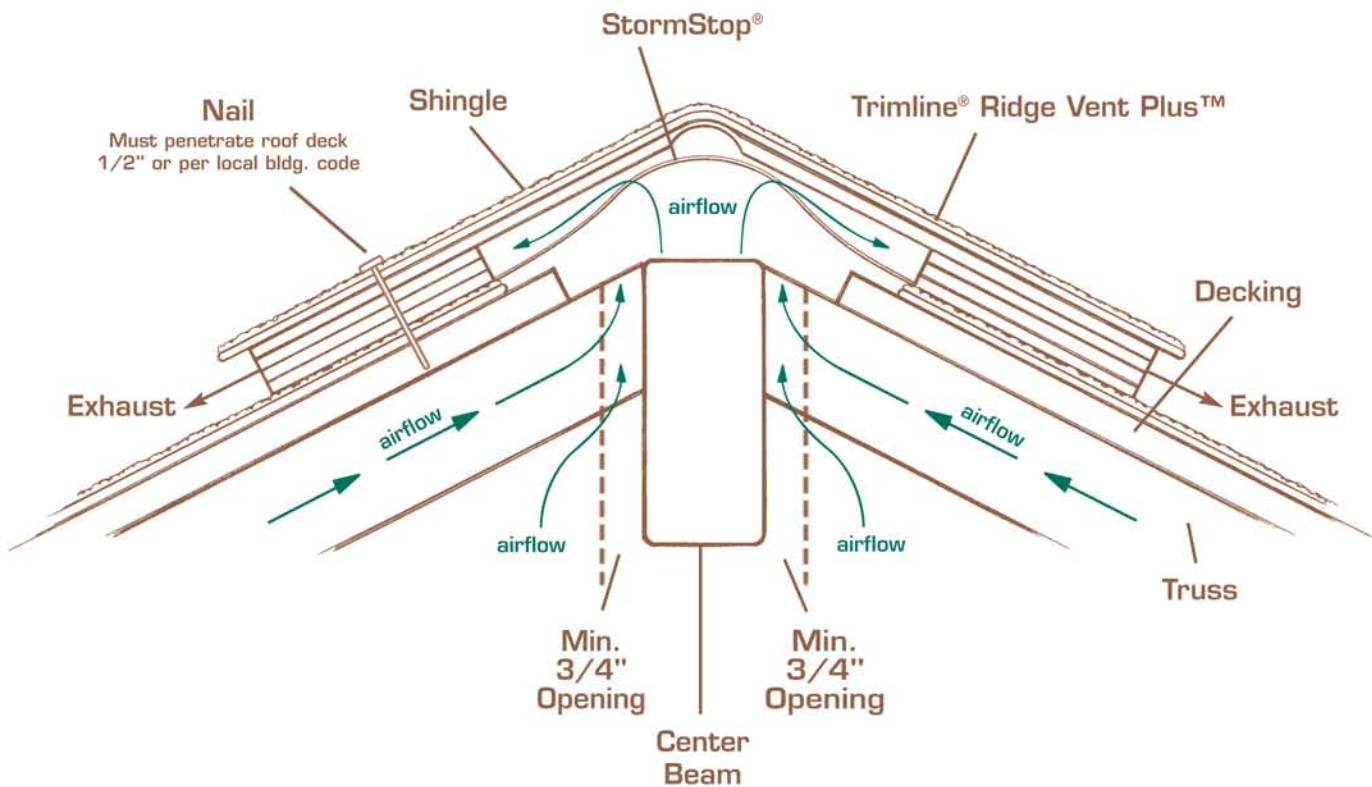

Note: Install with continuous soffit ventilation at each eave.

Low profile – min. 6.5" NFA per lineal foot at each eave.

High profile – min. 9.5" NFA per lineal foot at each eave.

Pitch Considerations: Trimline Shingle-Over Ridge Vents can be installed and will perform as stated in all literature on pitches from 2/12 to 20/12.

Fastening: Trimline vents can be secured by using pneumatic nail or staple tools. If staples are used, the crown should be a minimum width of 1".